





# GRAEF

Professional  
cutting technology









GRAEF










## PROFI Slicing Machines

Art.-No.	Picture	Description	Order-No.	Netto	
EURO 1920		<ul style="list-style-type: none"> <li>o Motor Power 230 V ~ alternating current 185 watts</li> <li>o Blade (Ø mm) 190 mm</li> <li>o Slice size (L x H) 200 x 145 mm</li> <li>o Slice thickness 0 – 15 mm</li> <li>o Slice dimensions (L x W) 225 x 200 mm</li> <li>o Footprint (L x W) 420 x 280 mm</li> <li>o Exterior dimensiions (L x W x H) 445 x 335 x 275 mm</li> <li>o Workspace (L x W x H) 535 x 350 x 420 mm</li> <li>o Blade speed 99 / rpm</li> <li>o Emissions noise level &lt; 69 dBA</li> <li>o Operating period 15 min</li> <li>o Net weight 9,4 kg</li> <li>o Accessories 2-disc blade sharpener, plastic tray and special oil</li> </ul>	230 V : Bi 1920 De		
EURO 1920 Bread		<ul style="list-style-type: none"> <li>o Identical with EURO 1920</li> <li>• Special toothed blade</li> </ul>	<ul style="list-style-type: none"> <li>o Plastic tray</li> <li>o Special oil</li> </ul>	230 V: Bi 1920 De1	
EURO 2550 Bread		<ul style="list-style-type: none"> <li>o Motor Power 230 V ~ alternating or 400 V ~ three-phase current 300 watts</li> <li>o Blade (Ø mm) 250 mm</li> <li>o Slice size (L x H) 230 x 165 mm</li> <li>o Slice thickness 0 – 15 mm</li> <li>o Slice dimensions (L x W) 230 x 250 mm</li> <li>o Footprint (L x W) 460 x 320 mm</li> <li>o Exterior dimensiions (L x W x H) 510 x 420 x 370 mm</li> <li>o Workspace (L x W x H) 600 x 510 x 480 mm</li> <li>o Blade speed 199 / rpm</li> <li>o Emissions noise level &lt; 69 dBA</li> <li>o Operating period Continuous duty</li> <li>o Net weight 20,5 kg</li> <li>o Feature Flat stainless steel blade, fully hardened, non stick coated with special serration</li> <li>o Accessories Special oil</li> </ul>	230 V: ga 2550 De  400 V: ga 2550 De1		
EURO 2500		<ul style="list-style-type: none"> <li>o Motor Power 230 V ~ alternating or 400 V ~ three-phase current 300 watts</li> <li>o Blade (Ø mm) 250 mm</li> <li>o Slice size (L x H) 230 x 165 mm</li> <li>o Slice thickness 0 – 15 mm</li> <li>o Slice dimensions (L x W) 230 x 250 mm</li> <li>o Footprint (L x W) 460 x 320 mm</li> <li>o Exterior dimensiions (L x W x H) 510 x 420 x 370 mm</li> <li>o Workspace (L x W x H) 600 x 510 x 480 mm</li> <li>o Blade speed 199 / rpm</li> <li>o Emissions noise level &lt; 69 dBA</li> <li>o Operating period Continuous duty</li> <li>o Net weight 20,1 kg</li> <li>o Accessories 2-disc blade sharpener, special oil</li> </ul>	230 V: ga 2500 De  400 V: ga 2500 De1		







## PROFI Slicing Machines

Art.-No.	Picture	Description	Order-No.	Netto*
EURO 2500 Cheese		<ul style="list-style-type: none"> <li>o Identical with EURO 2500</li> <li>o cheese blade</li> </ul>	230 V: ga 2500 De2 400 V: ga 2500 De3	
EURO 2560		<ul style="list-style-type: none"> <li>o Moto power 230 V ~ alternating or 400 V ~ three-phase current 300 watts</li> <li>o Blade (Ø mm) 250 mm</li> <li>o Slice size (L x H) 230 x 165 mm</li> <li>o Slice thickness 0 – 15 mm</li> <li>o Slice dimensions (L x W) 230 x 250 mm</li> <li>o Footprint (L x W) 460 x 320 mm</li> <li>o Exterior dimensiions (L x W x H) 520 x 410 x 425 mm</li> <li>o Workspace (L x W x H) 600 x 450 x 560 mm</li> <li>o Blade speed 199 / rpm</li> <li>o Emissions noise level &lt; 69 dBA</li> <li>o Operating period Continuous duty</li> <li>o Net weight 21,1 kg</li> <li>o Accessories 2-disc blade sharpener, special oil</li> </ul>	230 V: ga 2560 De 400 V: ga 2560 De1	
EURO 2560 Bread		<ul style="list-style-type: none"> <li>o Identical with EURO 2560</li> <li>• Special toothed blade</li> <li>o Special oil</li> </ul>	230 V : ga 2560 De4 400 V : ga 2560 De5	
EURO 3000		<ul style="list-style-type: none"> <li>o Motor power 230 V ~ alternating or 400 V ~ three-phase current 300 watts</li> <li>o Blade (Ø mm) 300 mm</li> <li>o Slice size (L x H) 230 x 190 mm</li> <li>o Slice thickness 0 – 15 mm</li> <li>o Slice dimensions (L x W) 230 x 250 mm</li> <li>o Footprint (L x W) 460 x 320 mm</li> <li>o Exterior dimensiions (L x W x H) 575 x 420 x 395 mm</li> <li>o Workspace (L x W x H) 670 x 540 x 485 mm</li> <li>o Blade speed 198 / rpm</li> <li>o Emissions noise level &lt; 69 dBA</li> <li>o Operating period Continuous duty</li> <li>o Net weight 21,8 kg</li> <li>o Accessories 2-disc blade sharpener, special oil</li> </ul>	230 V: ga 3000 De 400 V: ga 3000 De1	
EURO 3000 Bread		<ul style="list-style-type: none"> <li>o Identical with EURO 3000</li> <li>• Special toothed blade</li> <li>o Special oil</li> </ul>	230 V: ga 3000 De4 400 V: ga 3000 De5	
EURO 3000 Cheese		<ul style="list-style-type: none"> <li>o Identical with EURO 3000</li> <li>• cheese blade</li> <li>o 2-disc blade sharpener</li> <li>o Special oil</li> </ul>	230 V: ga 3000 De2 400 V: ga 3000 De3	


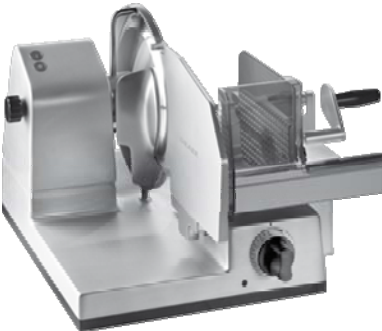


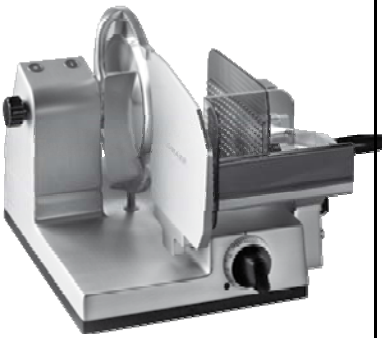
## PROFI Slicing Machines

Art.-No.	Picture	Description	Bestellnummer	UVP*
EURO 3060	  	<ul style="list-style-type: none"> <li>o Motor power 230 V ~ alternating or 400 V ~ three-phase current 300 watts</li> <li>o Blade (Ø mm) 300 mm</li> <li>o Slice size (L x H) 230 x 190 mm</li> <li>o Slice thickness 0 – 15 mm</li> <li>o Slice dimensions (L x W) 230 x 250 mm</li> <li>o Footprint (L x W) 460 x 320 mm</li> <li>o Exterior dimensions (L x W x H) 575 x 410 x 420 mm</li> <li>o Workspace (L x W x H) 670 x 490 x 590 mm</li> <li>o Blade speed 198 / rpm</li> <li>o Emissions noise level &lt; 69 dBA</li> <li>o Operating period Continuous duty</li> <li>o Net weight 21,7 kg</li> <li>o Accessories 2-disc blade sharpener, special oil</li> </ul>	230 V: ga 3060 De 400 V: ga 3060 De1	
EURO 3060 Bread	  	<ul style="list-style-type: none"> <li>o Identical with EURO 3060</li> <li>• Special toothed blade</li> <li>o Special oil</li> </ul>	230 V: ga 3060 De4 400 V: ga 3060 De5	
EURO 3060 Cheese	  	<ul style="list-style-type: none"> <li>o Identical with EURO 3060</li> <li>• cheese blade</li> <li>o 2-disc blade sharpener</li> <li>o Special oil</li> </ul>	230 V: ga 3060 De2 400 V: ga 3060 De3	










## MASTER Slicing Machines

Art.-No.	Picture	Description	Order-No.	Netto
EURO 2720	  	<ul style="list-style-type: none"> <li>o Motor power 230 V ~ alternating or 400 V ~ three-phase current 300 watts</li> <li>o Blade (Ø mm) 270 mm</li> <li>o Slice size (L x H) 230 x 167 mm</li> <li>o Slice thickness 0 – 15 mm</li> <li>o Slice dimensions (L x W) 230 x 250 mm</li> <li>o Footprint (L x W) 470 x 370 mm</li> <li>o Exterior dimensions (L x W x H) 540 x 510 x 390 mm</li> <li>o Workspace (L x W x H) 545 x 520 x 490 mm</li> <li>o Blade speed 190 / rpm</li> <li>o Emissions noise level &lt; 69 dBA</li> <li>o Operating period Continuous duty</li> <li>o Net weight 25,2 kg</li> <li>o Accessories 2-disc blade sharpener, special oil</li> </ul>	230 V: g1 27 De 400 V: g1 27 De1	
EURO 2720 Käse	  	<ul style="list-style-type: none"> <li>o Identical with EURO 2720</li> <li>• cheese blade</li> <li>o 2-disc blade sharpener</li> <li>o Special oil</li> </ul>	230 V: g1 27 De8 400 V: g1 27 De9	

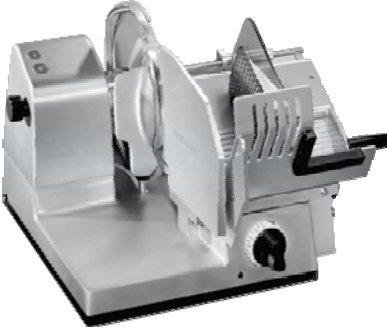

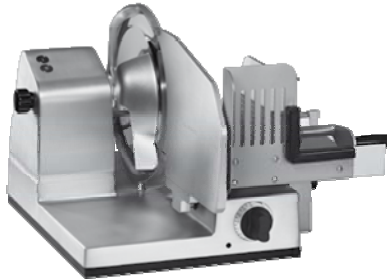






## MASTER Slicing Machines

Art.-No.	Picture	Description	Order-No.	Netto
EURO 2720 Teflon		<ul style="list-style-type: none"> <li>o Identical with EURO 2720</li> <li>• Blade, blade cover plate Teflon coated</li> <li>o 2-disc blade sharpener</li> <li>o Special oil</li> </ul>	230 V: g1 27 De2 400 V: g1 27 De3	
EURO 3020		<ul style="list-style-type: none"> <li>o Moto power 230 V ~ alternating or 400 V ~ three-phase current 500 watts</li> <li>o Blade (Ø mm) 300 mm</li> <li>o Slice size (L x H) 260 x 195 mm</li> <li>o Slice thickness 0 – 24 mm</li> <li>o Slice dimensions (L x W) 260 x 300 mm</li> <li>o Footprint (L x W) 540 x 440 mm</li> <li>o Exterior dimensiions (L x W x H) 600 x 570 x 420 mm</li> <li>o Workspace (L x W x H) 680 x 690 x 570 mm</li> <li>o Blade speed 230 / rpm</li> <li>o Emissions noise level &lt; 69 dBA</li> <li>o Operating period Continuous duty</li> <li>o Net weight 37,1 kg</li> <li>o Accessories 2-disc blade sharpener, special oil</li> </ul> <p>•Option <b>Cera® coating</b></p>	230 V: g1 30 De 400 V: g1 30 De1  additional charge	
EURO 3020 Cheese		<ul style="list-style-type: none"> <li>o Identical with EURO 3020</li> <li>• cheese blade</li> <li>o 2-disc blade sharpener</li> <li>o Special oil</li> </ul>	230 V: g1 30 De14 400 V: g1 30 De15	
EURO 3020 Teflon		<ul style="list-style-type: none"> <li>o Identical with EURO 3020</li> <li>• Blade, blade cover plate Teflon coated</li> <li>o 2-disc blade sharpener</li> <li>o Special oil</li> </ul>	230 V: g1 30 De2 400 V: g1 30 De3	
EURO 3020 W		<ul style="list-style-type: none"> <li>o Motor power 230 V ~ alternating or 400 V ~ three-phase current 500 watts</li> <li>o Blade (Ø mm) 300 mm</li> <li>o Slice size (L x H) 260 x 195 mm</li> <li>o Slice thickness 0 – 24 mm</li> <li>o Slice dimensions (L x W) 260 x 300 mm</li> <li>o Footprint (L x W) 540 x 440 mm</li> <li>o Exterior dimensiions (L x W x H) 600 x 570 x 420 mm</li> <li>o Workspace (L x W x H) 680 x 720 x 570 mm</li> <li>o Blade speed 230 / rpm</li> <li>o Emissions noise level &lt; 69 dBA</li> <li>o Operating period Continuous duty</li> <li>o Net weight 37,1 kg</li> <li>o Feature Weight control (can not be calibrated) Weighing range: 0 - 5000 g / 1 g/lbs division</li> </ul> <p>o Accessories 2-disc blade sharpener, special oil</p> <p>•Option <b>Cera® coating</b></p>	230 V: g1 30 De-W 400 V: g1 30 De-W1  additional charge	




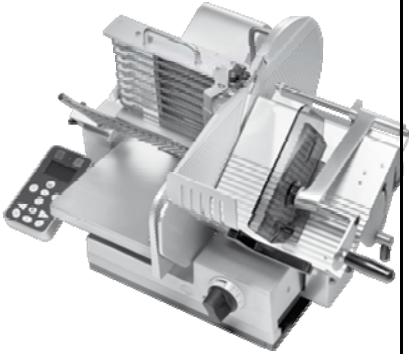


## MASTER Slicing Machines

Art.-No.	Picture	Description	Order-No.	Netto
EURO 3020 VS	  	<ul style="list-style-type: none"> <li>o Motor power 230 V ~ alternating or 400 V ~ three-phase current 500 watts</li> <li>o Blade (Ø mm) 300 mm</li> <li>o Slice size (L x H) 260 x 195 mm</li> <li>o Slice thickness 0 – 24 mm</li> <li>o Slice dimensions (L x W) 260 x 300 mm</li> <li>o Footprint (L x W) 540 x 440 mm</li> <li>o Exterior dimensions (L x W x H) 600 x 600 x 420 mm</li> <li>o Workspace (L x W x H) 720 x 650 x 700 mm</li> <li>o Blade speed 230 / rpm</li> <li>o Emissions noise level &lt; 69 dBA</li> <li>o Operating period Continuous duty</li> <li>o Net weight 38,5 kg</li> <li>o Feature Patented Vario-slice carriage</li> <li>o Accessories 2-disc blade sharpener, special oil</li> <li>•Option <b>Cera® coating</b></li> </ul>	<p>230 V: g1 30 De4 400 V: g1 30 De5</p> <p>additional charge</p>	
EURO 3310	  	<ul style="list-style-type: none"> <li>o Motor power 230 V ~ alternating or 400 V ~ three-phase current 500 watts</li> <li>o Blade (Ø mm) 330 mm</li> <li>o Slice size (L x H) 300 x 223 mm</li> <li>o Slice thickness 0 – 24 mm</li> <li>o Slice dimensions (L x W) 300 x 340 mm</li> <li>o Footprint (L x W) 540 x 440 mm</li> <li>o Exterior dimensions (L x W x H) 650 x 605 x 445 mm</li> <li>o Workspace (L x W x H) 740 x 725 x 600 mm</li> <li>o Blade speed 230 / rpm</li> <li>o Emissions noise level &lt; 69 dBA</li> <li>o Operating period Continuous duty</li> <li>o Net weight 37,9 kg</li> <li>o Accessories 2-disc blade sharpener, special oil</li> <li>•Option <b>Cera® coating</b></li> </ul>	<p>230 V: f1 3310 De 400 V: f1 3310 De1</p> <p>additional charge</p>	
EURO 3310 DS	  	<ul style="list-style-type: none"> <li>o Motor power 230 V ~ alternating or 400 V ~ three-phase current 500 watts</li> <li>o Blade (Ø mm) 330 mm</li> <li>o Slice size (L x H) 300 x 223 mm</li> <li>o Slice thickness 0 – 24 mm</li> <li>o Slice dimensions (L x W) 300 x 340 mm</li> <li>o Footprint (L x W) 540 x 440 mm</li> <li>o Exterior dimensions (L x W x H) 650 x 605 x 445 mm</li> <li>o Workspace (L x W x H) 740 x 690 x 600 mm</li> <li>o Blade speed 230 / rpm</li> <li>o Operating period Continuous duty</li> <li>o Emissions noise level &lt; 69 dBA</li> <li>o Net weight 41,2 kg</li> <li>o Feature Double ball-bearing support</li> <li>o Accessories 2-disc blade sharpener, special oil</li> <li>•Option <b>Cera® coating</b></li> </ul>	<p>230 V: f1 3310 De4 400 V: f1 3310 De5</p> <p>additional charge</p>	

## MASTER Slicing Machines










Art.-No.	Picture	Description	Order-No.	Netto
EURO 3310 EA	  	<ul style="list-style-type: none"> <li>o Motor power 230 V ~ alternating or 400 V ~ three-phase current 500 watts</li> <li>o Blade (Ø mm) 330 mm</li> <li>o Slice size (L x H) 300 x 210 mm</li> <li>o Slice thickness 0 – 24 mm</li> <li>o Restraint length (mm) 90 mm</li> <li>o Slice dimensions (L x W) 300 x 340 mm</li> <li>o Footprint (L x W) 540 x 440 mm</li> <li>o Exterior dimensions (L x W x H) 650 x 605 x 445 mm</li> <li>o Workspace (L x W x H) 740 x 725 x 600 mm</li> <li>o Blade speed 230 / rpm</li> <li>o Emissions noise level &lt; 69 dBA</li> <li>o Operating period Continuous duty</li> <li>o Net weight 45 kg</li> <li>o Feature <b>Carriage with grip arm</b></li> <li>o Accessories 2-disc blade sharpener, special oil</li> </ul>	230 V: fl 3310 De-ea 400 V: fl 3310 De1-ea	
EURO 3370	  	<ul style="list-style-type: none"> <li>o Motor power 230 V ~ alternating or 400 V ~ three-phase current 450 watts</li> <li>o Blade (Ø mm) 330 mm</li> <li>o Slice size (L x H) 300 x 244 mm</li> <li>o Slice thickness 0 – 24 mm</li> <li>o Slice dimensions (L x W) 300 x 340 mm</li> <li>o Footprint (L x W) 585 x 440 mm</li> <li>o Exterior dimensions (L x W x H) 660 x 620 x 470 mm</li> <li>o Workspace (L x W x H) 750 x 700 x 680 mm</li> <li>o Blade speed 229 / rpm</li> <li>o Emissions noise level &lt; 69 dBA</li> <li>o Operating period Continuous duty</li> <li>o Net weight 40,3 kg</li> <li>o Accessories 2-disc blade sharpener, special oil, slicing item retaining bar</li> </ul>	230 V: fl 3370 De 400 V: fl 3370 De1	
SA 3370	  	<ul style="list-style-type: none"> <li>o Motor power 230 V ~ alternating or 400 V ~ three-phase current 450 watts</li> <li>o Blade (Ø mm) 330 mm</li> <li>o Slice size (L x H) 295 x 244 mm</li> <li>o Slice thickness 0 – 24 mm</li> <li>o Slicing speed up to 80 stokes / min.</li> <li>o Slice dimensions (L x W) 300 x 340 mm</li> <li>o Footprint (L x W) 585 x 440 mm</li> <li>o Exterior dimensions (L x W x H) 660 x 620 x 510 mm</li> <li>o Workspace (L x W x H) 910 x 700 x 730 mm</li> <li>o Blade speed 229 U/min</li> <li>o Emissions noise level &lt; 69 dBA</li> <li>o Operating period Continuous duty</li> <li>o Net weight 50 kg</li> <li>o Feature <b>Automatic drive carriage</b></li> <li>o Accessories 2-disc blade sharpener, special oil</li> </ul>	230 V: sa 3370 De 400 V: sa 3370 De1	

## Semi Automatic Slicing Machines

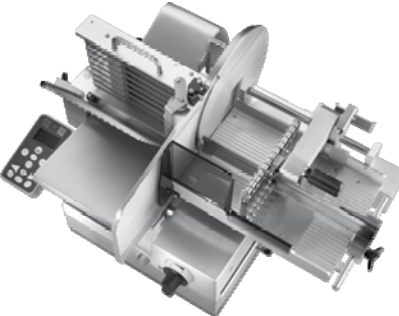

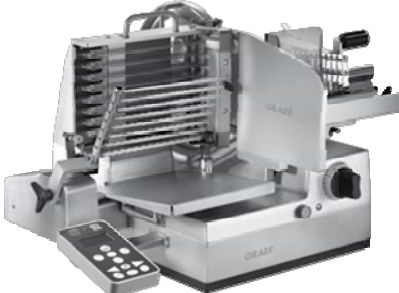

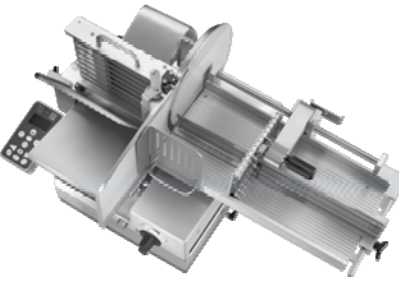




Art.-No.	Picture	Description	Order-No.	Netto
HA 800	   	<ul style="list-style-type: none"> <li>o Motor power 230 V ~ alternating or 400 V ~ three-phase current 500 watts</li> <li>o Blade (Ø mm) 300 mm</li> <li>o Slice length 250 mm</li> <li>o Slice height 180 mm</li> <li>o Slice thickness 0,5 – 10 mm</li> <li>o Interface serial</li> <li>o Stack height 60 mm</li> <li>o Tray size 300 x 250 mm</li> <li>o Tray distance 160 mm</li> <li>o Slice dimensions (L x W) 260 x 300 mm</li> <li>o Footprint (L x W) 540 x 440 mm</li> <li>o Exterior dimensions (L x W x H) 600 x 790 x 450 mm</li> <li>o Workspace (L x W x H) 700 x 850 x 570 mm</li> <li>o Blade speed 229 / rpm</li> <li>o Slices per minute max.. 160 / rpm</li> <li>o Operating period Continuous duty</li> <li>o Emissions noise level &lt; 69 dBA</li> <li>o Net weight 56 kg</li> </ul>		
HA 810	   	<ul style="list-style-type: none"> <li>o Motor power 230 V ~ alternating or 400 V ~ three-phase current 500 watts</li> <li>o Blade (Ø mm) 300 mm</li> <li>o Slice length 250 mm</li> <li>o Slice height 180 mm</li> <li>o Slice thickness 0,5 – 10 mm</li> <li>o Interface serial</li> <li>o Stack height 60 mm</li> <li>o Tray size 300 x 250 mm</li> <li>o Tray distance 160 mm</li> <li>o Slice dimensions (L x W) 260 x 300 mm</li> <li>o Footprint (L x W) 540 x 440 mm</li> <li>o Exterior dimensions (L x W x H) 600 x 810 x 450 mm</li> <li>o Workspace (L x W x H) 700 x 870 x 570 mm</li> <li>o Blade speed 229 / rpm</li> <li>o Slices per minute max.. 160 / rpm</li> <li>o Operating period Continuous duty</li> <li>o Emissions noise level &lt; 69 dBA</li> <li>o Net weight 56 kg</li> <li>o Feature Vario-slice carriage</li> </ul>		







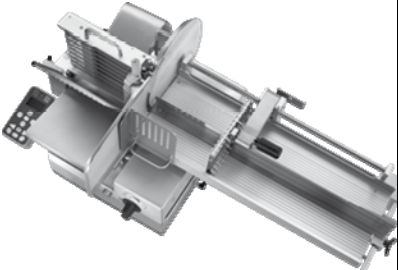

## Fully Automatic Slicing Machines

Art.-No.	Picture	Description	Order-No.	Netto*
<b>VA 802</b>	  	<ul style="list-style-type: none"> <li>o Motor power 230 V ~ alternating or 400 V ~ three-phase current 500 watts</li> <li>o Blade (Ø mm) 300 mm</li> <li>o Slice length 250 mm</li> <li>o Slice height 180 mm</li> <li>o Slice thickness 0,5 – 10 mm</li> <li>o Slicing speed 30 - 70 strokes / min.</li> <li>o Interface serial</li> <li>o Stack height <b>230 mm</b></li> <li>o Footprint (L x W) 540 x 440 mm</li> <li>o Exterior dimensions (L x W x H) 600 x 880 x 500 mm</li> <li>o Workspace (L x W x H) 700 x 900 x 640 mm</li> <li>o Blade speed 229 / rpm</li> <li>o Slices per minute. 70 / rpm</li> <li>o Operating period Continuous duty</li> <li>o Emission noise level &lt; 69 dBA</li> <li>o Net weight 69 kg</li> </ul>		
<b>VA 802 H</b>	  	<ul style="list-style-type: none"> <li>o Motor power 230 V ~ alternating or 400 V ~ three-phase current 500 watts</li> <li>o Blade (Ø mm) 300 mm</li> <li>o Slice length 250 mm</li> <li>o Slice height 180 mm</li> <li>o Slice thickness 0,5 – 10 mm</li> <li>o Slicing speed 30 - 70 strokes / min.</li> <li>o Interface serial</li> <li>o Stack height <b>230 mm</b></li> <li>o Footprint (L x W) 540 x 440 mm</li> <li>o Exterior dimensions (L x W x H) 600 x 880 x 500 mm</li> <li>o Workspace (L x W x H) 700 x 900 x 640 mm</li> <li>o Blade speed 229 / rpm</li> <li>o Slices per minute 70 / rpm</li> <li>o Operating period Continuous duty</li> <li>o Emission noise level &lt; 69 dBA</li> <li>o Net weight 69 kg</li> <li>o Feature <b>Can be switched to manual carriage operation</b></li> </ul>		
<b>VA 804</b>	  	<ul style="list-style-type: none"> <li>o Motor power 230 V ~ alternating or 400 V ~ three-phase current 500 watts</li> <li>o Blade (Ø mm) 300 mm</li> <li>o Slice length 250 mm</li> <li>o Slice height 180 mm</li> <li>o Slice thickness 0,5 – 10 mm</li> <li>o Slicing speed 30 - 60 strokes / min</li> <li>o Interface serial</li> <li>o Stack height <b>420 mm</b></li> <li>o Footprint (L x W) 540 x 440 mm</li> <li>o Exterior dimensions (L x W x H) 600 x 1060 x 500 mm</li> <li>o Workspace (L x W x H) 700 x 1100 x 640 mm</li> <li>o Blade speed 229 / rpm</li> <li>o Slices per minute 60 / rpm</li> <li>o Operating period Continuous duty</li> <li>o Emission noise level &lt; 69 dBA</li> <li>o Net weight 70 kg</li> </ul>		

## Fully Automatic Slicing Machines

Art.-No.	Picture	Description	Order-No.	Netto
VA 804 FB short	  	<ul style="list-style-type: none"> <li>o Motor power 230 V ~ alternating or 400 V ~ three-phase current 500 watts</li> <li>o Blade (Ø mm) 300 mm</li> <li>o Slice length 250 mm</li> <li>o Slice height 180 mm</li> <li>o Slice thickness 0,5 – 10 mm</li> <li>o Slicing speed 30 - 60 strokes / min</li> <li>o Interface serial</li> <li>o Stack height <b>420 mm</b></li> <li>o Conveyor belt <b>690 mm</b></li> <li>o Footprint (L x W) 656 x 553 mm</li> <li>o Exterior dimensions (L x W x H) 1053 x 1074 x 1350 mm</li> <li>o Workspace (L x W x H) 1200 x 1200 x 1400 mm</li> <li>o Blade speed 229 / rpm</li> <li>o Slices per minute 60 / rpm</li> <li>o Operating period Continuous duty</li> <li>o Emission noise level &lt; 69 dBA</li> <li>o Net weight 70 kg</li> </ul>		
VA 804 FB long	  	<ul style="list-style-type: none"> <li>o Motor power 230 V ~ alternating or 400 V ~ three-phase current 500 watts</li> <li>o Blade (Ø mm) 300 mm</li> <li>o Slice length 250 mm</li> <li>o Slice height 180 mm</li> <li>o Slice thickness 0,5 – 10 mm</li> <li>o Slicing speed 30 - 60 strokes / min</li> <li>o Interface serial</li> <li>o Stack height <b>420 mm</b></li> <li>o Conveyor belt <b>1300 mm</b></li> <li>o Footprint (L x W) 656 x 553 mm</li> <li>o Exterior dimensions (L x W x H) 1653 x 1074 x 1350 mm</li> <li>o Workspace (L x W x H) 1200 x 1200 x 1400 mm</li> <li>o Blade speed 229 / rpm</li> <li>o Slices per minute 60 / rpm</li> <li>o Operating period Continuous duty</li> <li>o Emission noise level &lt; 69 dBA</li> <li>o Net weight 70 kg</li> </ul>		
VA 806	  	<ul style="list-style-type: none"> <li>o Motor power 230 V ~ alternating or 400 V ~ three-phase current 500 watts</li> <li>o Blade (Ø mm) 300 mm</li> <li>o Slice length 250 mm</li> <li>o Slice height 180 mm</li> <li>o Slice thickness 0,5 – 10 mm</li> <li>o Slicing speed 30 - 55 strokes / min</li> <li>o Interface serial</li> <li>o Stack height <b>600 mm</b></li> <li>o Footprint (L x W) 540 x 440 mm</li> <li>o Exterior dimensions (L x W x H) 600 x 1240 x 500 mm</li> <li>o Workspace (L x W x H) 700 x 1280 x 640 mm</li> <li>o Blade speed 229 / rpm</li> <li>o Slices per minute 55 / rpm</li> <li>o Operating period Continuous duty</li> <li>o Emission noise level &lt; 69 dBA</li> <li>o Net weight 78 kg</li> </ul>		




## Fully Automatic Slicing Machines

Art.-No.	Picture	Description	Order-No.	Netto
VA 806 FB short	 	<ul style="list-style-type: none"> <li>o Motor power 230 V ~ alternating or 400 V ~ three-phase current 500 watts</li> <li>o Blade (Ø mm) 300 mm</li> <li>o Slice length 250 mm</li> <li>o Slice height 180 mm</li> <li>o Slice thickness 0,5 – 10 mm</li> <li>o Slicing speed 30 - 55 strokes / min</li> <li>o Interface serial</li> <li>o Stack height <b>600 mm</b></li> <li>o Conveyor belt <b>690 mm</b></li> <li>o Footprint (L x W) 656 x 553 mm</li> <li>o Exterior dimensions (L x W x H) 1053 x 1268 x 1350 mm</li> <li>o Workspace (L x W x H) 1200 x 1400 x 1500 mm</li> <li>o Blade speed 229 / rpm</li> <li>o Slices per minute 60 / rpm</li> <li>o Operating period Continuous duty</li> <li>o Emission noise level &lt; 69 dBA</li> <li>o Net weight 80 kg</li> </ul>		
VA 806 FB long	 	<ul style="list-style-type: none"> <li>o Motor power 230 V ~ alternating or 400 V ~ three-phase current 500 watts</li> <li>o Blade (Ø mm) 300 mm</li> <li>o Slice length 250 mm</li> <li>o Slice height 180 mm</li> <li>o Slice thickness 0,5 – 10 mm</li> <li>o Slicing speed 30 - 55 strokes / min</li> <li>o Interface serial</li> <li>o Stack height <b>600 mm</b></li> <li>o Conveyor belt <b>1300 mm</b></li> <li>o Footprint (L x W) 850 x 553 mm</li> <li>o Exterior dimensions (L x W x H) 1653 x 1268 x 1350 mm</li> <li>o Workspace (L x W x H) 1800 x 1400 x 1500 mm</li> <li>o Blade speed 229 / rpm</li> <li>o Slices per minute 60 / rpm</li> <li>o Operating period Continuous duty</li> <li>o Emission noise level &lt; 69 dBA</li> <li>o Net weight 80 kg</li> </ul>		
Interleaver	 	<ul style="list-style-type: none"> <li>o Dimensions (L x W x H) 540 x 270 x 550 mm</li> <li>o Voltage / Frequency 230 V / 50 Hz</li> <li>o Special voltage Available on request (z.B. 110 V / 60 Hz)</li> <li>o Placement speed trays, paper, foils max: 60 / rpm</li> <li>o Operating pressure 4 - 5 bar</li> <li>o Dimensions, tray paper, foils max. 170 x 250 mm</li> <li>o Weight paper, foils min. 65 g/m<sup>2</sup></li> <li>o Accessories Separator appliance to separate from 2 pack foils or trays Three-segment filter (pressure control device with manometer, moisture separator, oil and dirt filter)</li> </ul>		

## Blades and Accessories

	Description	Order-No	Netto
Graef special blade	EURO 1900 / EURO 1900 x smooth	1921402	
	EURO 1900 / EURO 1900 x toothed	192140	
	EURO 1920 smooth	1921401	
	EURO 1920 toothed	192142	
	EURO 2000 S / 2005 smooth	2000402	
	EURO 2000 S / 2005 toothed	2010402	
	EURO 2200 / 2210 smooth	2220434	
	EURO 2200 / 2210 toothed	2210434	
	EURO 2250 / 2260 toothed	2250434	
	EURO 2500 / EURO 2560 S / EURO 2501 smooth	2501434	
	EURO 2500 / EURO 2560 S / EURO 2501 toothed	2560434	
	EURO 2700 / EURO 2710 smooth	2700434	
	EURO 2720 / G 127 smooth	143946	
	EURO 3000 / EURO 3060 S / EURO 3002 / EURO 3004 / EURO 3010 / EURO 4000 / EURO A3000 smooth	3000434	
	EURO 3000 / EURO 3060 S / EURO 3002 / EURO 3004 / EURO 3010 / EURO 4000 / EURO A3000 toothed	30601434	

## Blades and Accessories

	Description	Order-No.	Netto
<b>Graef special blade</b>	EURO 3020 / G 130 / HA 800 Series / VA 800 Series smooth	143942	
	EURO 3310 / 3300 / SA 330 / VA 400 smooth	3300434	
	EURO 3370 smooth	144805	
	Cheese blade (teflon coated)	depending on model	
<b>Option</b> 	Machine table Mati 1 L 656 mm x W 553 mm x H 720 mm	MATI 1	
	Machine table Mati 2 L 656 mm x W 553 mm x H 776 mm On rollers	MATI 2	
	Machine table Mati 3 L 850 mm x W 553 mm x H 816 mm on rollers and large delivery Recommended for Fully Automatic slicing machines with conveyor belt 1300 mm	MATI 3	
<b>Accessories</b>	Grinding wheel, green	143777	
	Grinding stone, red	143778	
	Special oil 9 ml	23021	



Seit 1920

Gebr. Graef GmbH & Co. KG  
Donnerfeld 6  
59757 Arnsberg

Tel. +370 37 322877  
Fax +370 37 308856

Email: [pack@rotoma.com](mailto:pack@rotoma.com)

[www.graef.de](http://www.graef.de)